

UES Weather Louvre – Model WL

The UES **WL Weather Louvre** is suitable for a wide range of outdoor applications i.e. fresh air intake or extract. Standard weather louvres are the single bank weather louvre type used in countless installations throughout the world.

Available in variety of sizes, all WL types have a single bank of blades with a 45° face for good levels of rain resistance in all but the most demanding conditions.

Minimal resistance to airflow is assured with an approximate free area of 50% on all formats.

APPLICATIONS



Airport /Cinema /Computer Room /Exhibition Centre /Hospital/Hotel Kitchen /Laboratory /Marine & Offshore /Office Area /Restaurant Supermarket /Theatre

CONSTRUCTION

Material :- Aluminium, grade 1060.

Material Thickness :- 0.7mm +/- 0.03

Blades:- 45° Face Slope, Spacing 40mm

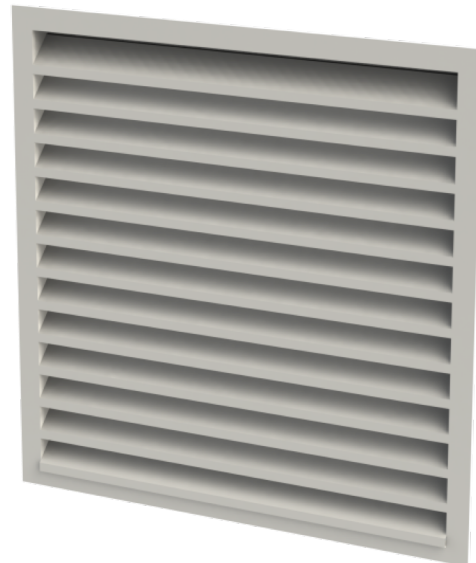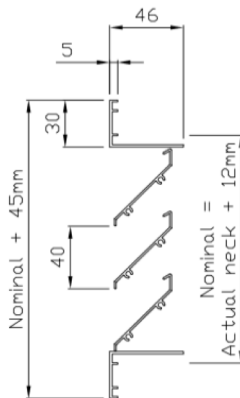

UES Weather Louvre – Model WL

UES Weather Louvre – Model WL

SELECTION DATA / WL

